

MP-02Z

Network Digital Signage Player

Overview

The MP-02Z video playback system offers digital signage capabilities in a compact network-capable package. Interface with new customers through dynamic signage or download online data- it's all possible with the MP-02Z. The MP-02Z Network MPEG playback system can store and load DVD quality audio and video (MPEG 1/2/4, MP3, JPEG) from compact flash cards up to 4GB, perfect for broadcasting solutions is now available with multiple zones.

The MP-02Z online and zoning features make it the video playback system with the most flexibility and its quality manufacturing guarantees reliability for information kiosks, dynamic signage, and other video

Features and Options

- Various video codecs and card formats supported
- Multi-language support
- MP3 playback capability

Specifications

Hardware

- ESS 6425 chipset
- Video Output / Audio Output +12V
- On board EEPROM memory

I/O

- VGA, S-Video, Component Video
- Stereo phone jack
- Compact Flash reader

Data Rates



Format	VCD	AVI/Divx	AVI/Divx
Resolution	352x240	720x480	640x480
NTSC/PAL	352x288	720x576	640x480
Video Compression	MPEG 1	MPEG 2	MPEG 4
Video Bitrate	1150kbps	< 5kbps	< 5kbps

Mechanical and Environment

- Single Voltage +12V/1A w/ ACPI function support
- Operation Temperature: 0~60°C [32~140°F]
- Humidity: 85% maximum
- 132 x 102 x 30 mm [5.2 x 4.02 x 1.18 inch]
- 450 g [0.99 lbs]

Audio / Video Support

- 2 channel audio DAC
- MPEG 1/2/4, MP3, JPEG, AVI

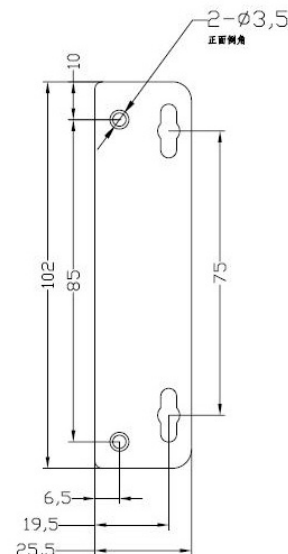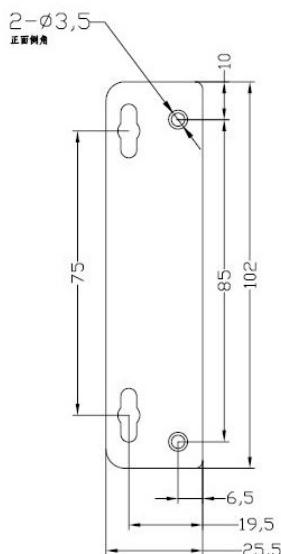

Caltron Industries Inc
Display Solutions Provider Since 1997

T=1,0

